

CITY OF NEW ORLEANS Department of Transportation and Development Fleur de Lis Dr.

(30th – Old Hammond Hwy)
Pre-Construction Community Meeting

Agenda

Introductions

• Fleur de Lis Dr. Reconstruction Project (30th to Old Hammond Hwy)

- What to expect during construction
- Discussion



Project Area





Fleur de Lis Dr.

(30th – Old Hammond Hwy)

• **Design:** GEC, Inc.

Construction Management:
 ECM Consultants, LLC

Construction: Command
 Construction Industries, LLC.



- Approximately **\$12M** project
- **Timeline:** Mobilization to the staging area to begin in February and last through summer of 2018


Fleur de Lis Dr.

(30th – Old Hammond Hwy)



Existing conditions of Fleur De Lis Dr. at Tacoma yields a Pavement Condition Index of Failure

Typical Street Right of Way Cross-Section

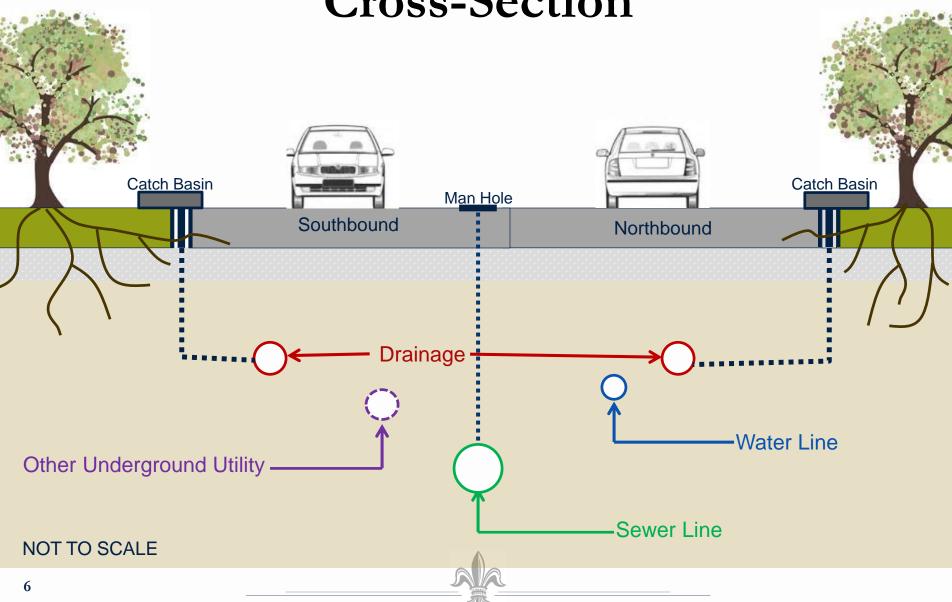

Fleur de Lis Dr.

(30th – Old Hammond Hwy)

Scope of work includes:

- Installing new subsurface sewer, water and drainage lines
- Manhole adjustments
- Removing existing roadway and replacing it with a new reinforced concrete roadway including new concrete curb and gutter bottom.
- Removing and replacing sidewalks and driveways aprons
- Installing Americans with Disabilities Act-compliant curb ramps at intersections
- Roadway striping



Subsurface Utility Replacements

• Replace existing sewer, water and drainage lines





A trench will be dug to replace the underground infrastructure.



Subsurface Utility Replacements

- Minimal water service disruptions
- Notifications will be sent to residents 48hours prior to any work that may cause water service disruptions





Drainage / New Catch Basins

 New drainage lines will help evacuate rain water from the roadway more rapidly.





Sidewalks and Driveway Aprons



- Existing sidewalks will be replaced with new four foot sidewalks
- New sidewalks and ramps will meet ADA compliance regulations





Americans with Disabilities Act-Compliant Curb Ramps



Americans with Disabilities Act (ADA)-compliant curb ramps at sidewalk corners ensure accessibility for people who are visually or physically impaired, using wheelchairs or strollers.

Fleur de Lis Dr.

(30th – Old Hammond Hwy)



Existing conditions of Fleur De Lis Dr. at Tacoma yields a Pavement Condition Index of Failure

13

*Future Conditions



* This section of Fleur de Lis Dr. will look similar to the other phases at the conclusion of construction.




What to Expect During Construction Traffic

- Two-way traffic will be shifted to the south bound side of Fleur de Lis Dr. while crews work on the north bound side of the roadway.
- One travel lane will be maintained, in each direction, throughout construction.
- Limited parking will be available near the trench site.
- Crews will attempt to allow local access to driveways in the evening.
- Two crews will be on-site.




What to Expect During Construction

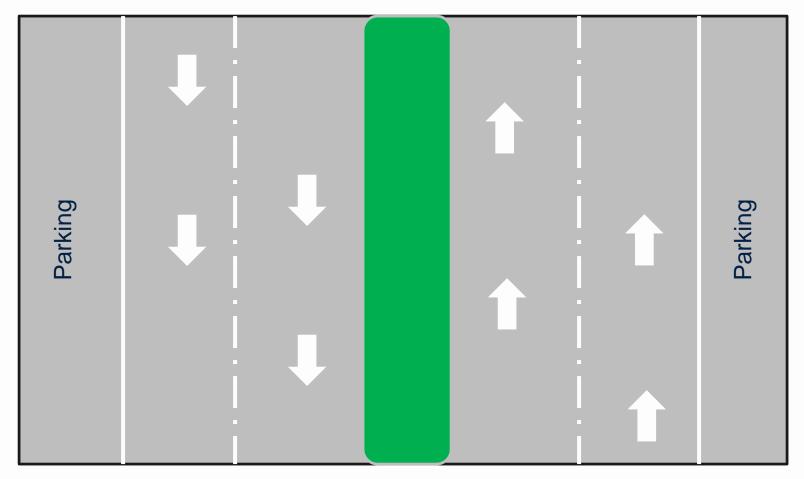

Current traffic flow (not to scale)



What to Expect During Construction

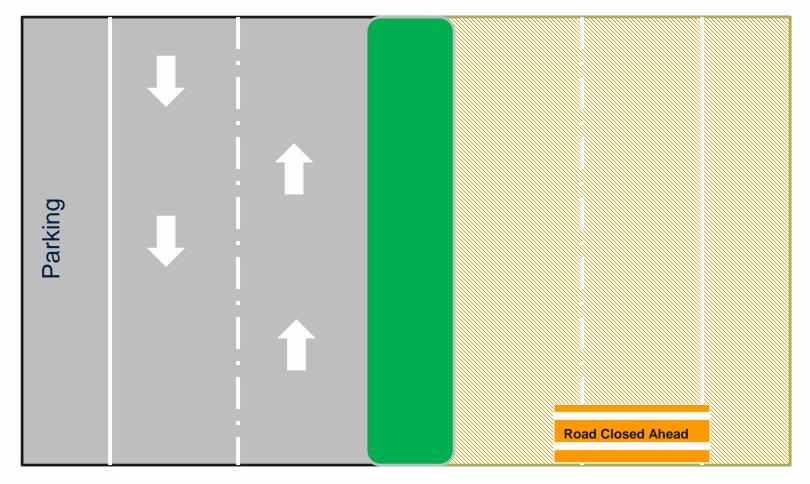

Temporary traffic flow (not to scale)



What to Expect During Construction

Temporary construction impacts

- Additional construction equipment
- Limited parking availability
- Sounds
- Dust


Efforts to minimize construction impacts

- Construction signage placed around the sites.
- Any temporary closures will be communicated in advance.
- Any changes to garbage and US Postal services will be communicated in advance.
- Residents will be informed throughout construction.

Regular work hours are Monday-Friday 7:00 a.m. to 5:30 p.m. Permission for occasional weekend work may be granted, if required.



Keeping You Informed Roadwork.nola.gov

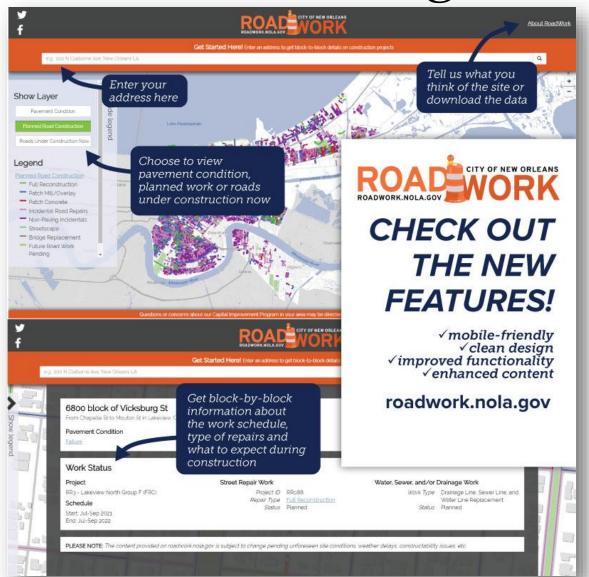

Stay Connected With Us



Construction Hotline: 504.658.ROAD (7623)



Facebook.com/roadworkNOLA



@roadworkNOLA



We have also joined Next Door!



Contact Information:

Department of Public Works
Cheryn Robles
504-658-ROAD (7623)
roadwork@nola.gov



Discussion